


Intended for use on overhead doors or compartments, these hinges hold open after opening 75° and release upon over-opening. They surface mount on the inside of a face frame that is 14mm (9/16") to 16mm (55/8") thick. Can be used with doors up to 20mm (3/4") thick. Door can overlay the frame up to 18mm (11/16"). Requires #6 round-head screws.

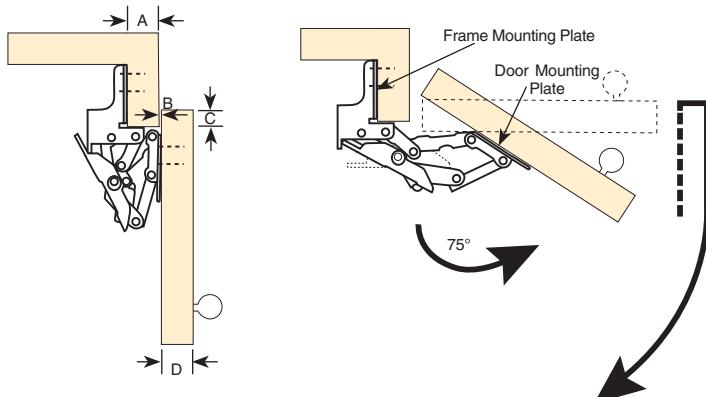

| | | | | | |
|----------|-------------------------------|------------------|---------------|--------------|--|
| A | Face Frame Thickness | 16mm (5/8") | 15mm (19/32") | 14mm (9/16") | |
| B | Min. Opening Clearance | 2mm | 3mm | 4mm | |
| C | Door Overlay | 0mm to 18mm max. | | | |
| D | Door Thickness | 0mm to 20mm max. | | | |

1. Mark the position of the frame mounting plate onto the frame such that the overhang is flush with the edge of the face frame. (See diagram above.)
2. Secure with #6 screws.
3. Carefully pull on the door mounting plate until the hinge is locked in the open position.
4. Mark the position of the door mounting plate onto the inside face of the door such that the center of the upper elongated hole in the plate is 9/16" (plus amount of overlay) from the top edge of the door.
5. Partially install #6 screws in the two elongated holes.
6. Make any necessary adjustments for proper closing.
7. Tighten the existing screws to lock in adjustment, then install the remaining two screws.

 Lee Valley TOOLS LTD.

www.leevalley.com

1090 Morrison Drive 814 Proctor Avenue
Ottawa ON K2H 1C2 Ogdensburg NY 13669-2205
Canada United States
1-800-267-8761 1-800-267-8735