


These stylish flush-mount retractable knobs with catch can be used either left or right handed. They are rated for a holding force of 20kg (44 lb), and can be used on material from 19mm to 30mm (3/4" to 13/16") thick.

The push knob comes assembled. To mount it to a door, first depress the knob to its open position, then gently pull out the push knob base from the latch body.

1. Drill a 1 1/8" dia. hole into the cabinet door.
 - a. For inset applications: center hole 39mm from the edge of the door.
 - b. For overlay applications: center hole 40mm from the edge of the door plus the amount the door overlays the cabinet.
2. Fasten latch body to back of door.
 - a. For doors 19mm to 24mm (3/4" to 15/16") thick: use the short screws.
 - b. For doors 25mm to 30mm (63/64" to 13/16") thick: use the long screws.
3. Turn knob until it projects 21.5mm from the face of the door to ensure that the knob will sit flush with the push knob base when it is in the closed position.
4. Press the push knob base into the front of the door and over the knob, taking care to align the internal groove in the base with the notch at the base of the knob and the notch in the collar on the latch body.
5. Fasten the catch plate to the cabinet.
 - a. For inset applications: 2.5mm from the front of the cabinet plus the thickness of the door, and centered on the latch body.
 - b. For overlay applications: 2.5mm from the front of the cabinet and centered on the latch body.

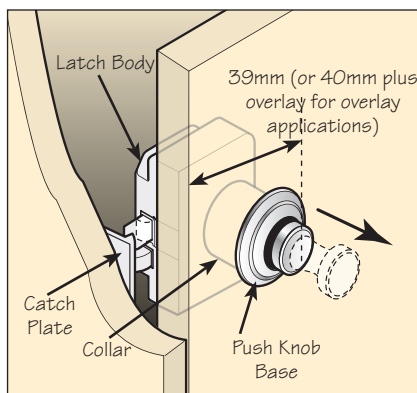

www.leevalley.com

1090 Morrison Drive	814 Proctor Avenue
Ottawa ON K2H 1C2	Ogdensburg NY 13669-2205
Canada	United States
1-800-267-8761	1-800-267-8735