



The copper pyramid comes unassembled for shipping purposes. All required hardware is included and holes for assembling it are pre-drilled. Assembly should take about 30 minutes.

Qty.	Description
1	Top Ball Assembly (A)
1	Tapered Cup Connector (B)
5	Copper Tubes with Capped Feet (C)
1	9" dia. Ring (D)
1	17" dia. Ring (E)
5	Flat-Head Steel Machine Screws
10	Round-Head Machine Screws
10	Acorn Nuts

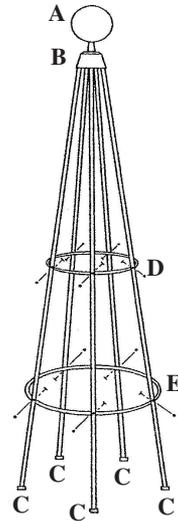

Assemble the copper pyramid on a clean, flat surface.

1. Insert one round-head machine screw into one of the holes in the large ring (E) such that the threaded end of the screw faces out.
2. Place one of the tubes (C) onto the threaded end of the screw such that the dimpled side of the tube faces the ring, and secure with one of the acorn nuts. **Do not** fully tighten.
3. Repeat *steps 1* and *2* to attach the small ring (D) to the tube.
4. Secure the steel tapered cup connector (B) to the top end of the tube with a flat-head machine screw. **Do not** fully tighten.
5. Repeat *steps 1* to *4* to secure the remaining tubes, one at a time.
6. Stand the copper pyramid upright and fully tighten all of the screws and acorn nuts.
7. Fasten the top ball assembly (A) to the tapered cup connector.



 **Lee Valley** TOOLS LTD.

leevalley.com

1090 Morrison Drive 814 Proctor Avenue
 Ottawa ON K2H 1C2 Ogdensburg NY 13669-2205
 Canada United States
 1-800-267-8761 1-800-267-8735